


VEHICLE EXHAUST

EXHAUST NOZZLES

Movex complete range of exhaust nozzles for vehicle exhaust.
If you have specific needs for exhaust extractors, please contact Movex.

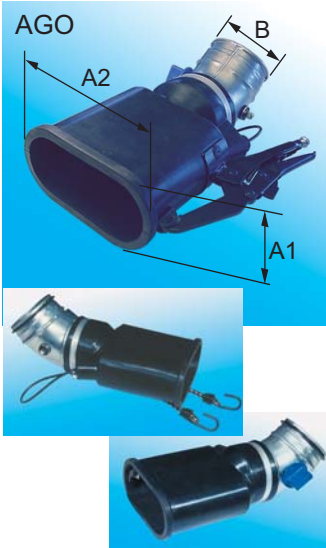

Oval rubber nozzle, AGO & AGOS

AGO and AGOS rubber nozzles with oval connection, that are easily connected to single and double exhaust pipes, up to 6" x 3 3/8". Can be mounted with pliers, clamp or strap, co-socket has a diameter of 7/8".

- **AGO** without damper
- **AGOS** with tight-fitting damper

Temp. range: -20°F to 300°F
Weight: approx. 2.2 lb

Article no.	A1 Ø inch	A2 oval	B inch
AGO-075(X)*	2 3/4"	6x3 3/8"	3"
AGO-100(X)*	2 3/4"	6x3 3/8"	4"
AGO-125(X)*	2 3/4"	6x3 3/8"	5"
AGOS-075(X)*	2 3/4"	6x3 3/8"	3"
AGOS-100(X)*	2 3/4"	6x3 3/8"	4"
AGOS-125(X)*	2 3/4"	6x3 3/8"	5"

*(X) T=Pliers K=Clamp S=Strap



Nozzle with pliers, AT & ATS

Nozzle with pliers with round opening. Manufactured of powder coated steel. Impact protection of rubber. Delivered with co-socket.

- **AT** without damper
- **ATS** with tight-fitting damper

Temp. range: -20°F to 400°F
Weight: 3.8 - 5 lb

Article no.	A inch	B inch
AT/ATS 125-100	5"	4"
125-125	5"	5"
AT/ATS *160-100	6 1/4"	4"
*160-125	6 1/4"	5"
*160-150	6 1/4"	6"
*160-160	6 1/4"	6 1/4"

* no co-socket



Nozzle with clamp, AK

Manufactured of powder coated steel. Impact protection of rubber. Delivered with co-socket and mounting straps.

- **AK** without damper
- **AKS** with tight-fitting damper


Temp. range: -20°F to 400°F Weight: approx 3.3 lb

Article no.	A inch	B inch
AK/AKS-075	3"	3"
-100	4"	4"
-125	5"	5"
-150	6"	6"

The Movex range also includes fans, accessories and automatic control units for exhaust extractors

MOVEX[®]
EXHAUST EXTRACTORS
Pure advantage

EXHAUST NOZZLES

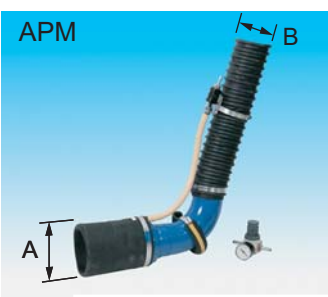


Pneumatic rubber nozzle, APM
 Complete set that fits e.g. hose reels and exhaust arms of the ASA model.
 The pneumatic nozzle is connected to the exhaust pipe by blowing compressed air into the manchette that then clamps to the pipe. The nozzle is delivered complete with pipe bend, approx. 3 feet hose, sliding valve and pressure regulator.
 Temp. range: -20°F to 300°F Weight: approx 6.5 lb
 The pressure to the manchette must not exceed 11.5 PSI.

Article no.	A inch	B inch
APM -100	4"	3 alt. 4"
APM -125	5"	4 alt. 5"
APM -160	6"	5 alt. 6"
APM -200	8"	5 alt. 6"



Pneumatic rubber nozzle, APMM
 Pneumatic rubber nozzle.
 Nozzle delivered with 1/2" straight air connection.
 Temp. range: -20°F to 300°F Weight: approx 3.3 lb
 The pressure to the manchette must not exceed 11.5 PSI.
 If you have applications at other temperatures, contact MOVEX.

Article no.	A inch
APMM -100	4"
APMM -125	5"
APMM -160	6"
APMM -200	8"

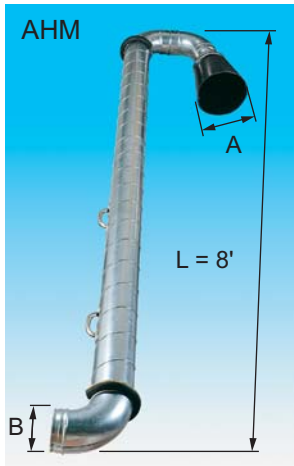

Nozzle and high mounted exhaust pipe, AHM
 Manufactured of galvanized steel. Complete with lifting handle and impact protection. Rubber funnel of reinforced rubber sheet
 Temp. range: -20°F to 300°F Weight: approx 18 lb

Article no.	A inch	B inch
AHM -100	10"	4"
AHM -125	10"	5"
AHM -160	10"	6"




Branch coupling, AGK
 Branch coupling for double exhaust pipes. Branch pipe is manufactured of galvanized steel.
 Hose AG: Flame-retardant, capable of carrying vehicles, suitable for vehicle exhaust. Complete with hose clamp. 3 feet hose per branch

Article no.	A inch
AGK -075	3"
AGK -100	4"
AGK -125	5"

Safety hose breaking device, ASK
 Manufactured of aluminium and plastic or EPDM rubber with steel reinforcement. Delivered complete with female and male part.
 Temp. range: -20°F to 400°F Weight: 2.2 lb

Article no.	A inch
SB -075	3"
SB -100	4"
SB -125	5"
SB -150	6"

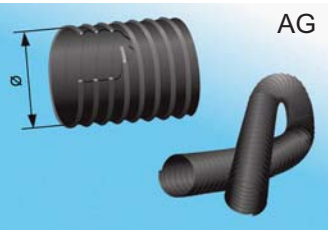

Hose, AG
 Flame-retardant, crush recoverable, suitable for vehicle exhaust. Heat resistant, rubberized fabric EPDM polyester. Spiral of EPDM coated polyester.
 Hose lengths can be joined by screwing together.

Article no.	Hose Ø inch	Hose length feet
AG-075	3"	16.5' and 33'
AG-100	4"	16.5' and 33'
AG-125	5"	16.5' and 33'
AG-150	6"	16.5' and 33'
Temperature range		-20°F to 340°F
Hoses with temperatures ranges up to 2200°F are included in the range		

Dealer: